

CBS-R27

2U Rackmount Chassis




Features

- 2U rackmount 18.1" depth chassis.
- Supports Micro-ATX and Mini-ITX motherboards.
- Four 3.5" swappable HDD bays (option two/four internal 2.5" HDD bays).
- Two front USB ports.
- Four Low-profile/half-length I/O expansion slots.
- Ideal choice for server and storage applications.

Specifications

M/B Form Factor	Micro-ATX, Mini-ITX
Dimension (W x D x H)	437mm x 460.5mm x 88.7mm (17.2" x 18.1" x 3.5")
Color	Black (Front panel only)
Processor Support	-
Drive Bay	4 x 3.5" swappable HDD bay 2/4 x 2.5" internal HDD bay
Peripheral Bay	1 x Slim ODD bay
Backplane	SAS/SATA to SATA 6Gb/s backplane
Expansion Slot	4 x Low-profile/half-length
System Cooling	2 x 80mm PWM fan
Front I/O	2 x USB 2.0
Button	1 x Power button 1 x Reset button
LED	1 x Power LED 1 x HDD activity LED 2 x Network LED 1 x System overheat LED
Security	Chassis intrusion switch
Power Supply (optional)	PS/2 ATX single power supply (150mm(W) x 190mm(D) x 86mm(H)) PS/2 mini redundant power supply (150mm(W) x 190mm(D) x 84mm(H))
Environment	Operating Temperature: 10° ~ 35°C (50°F ~ 95°F) Storage Temperature: -40° ~ 70°C (-40°F ~ 158°F) Operating Humidity: 8% ~ 90%RH (non-condensing) Storage Humidity : 5% ~ 95%RH (non-condensing)

Front / Rear View

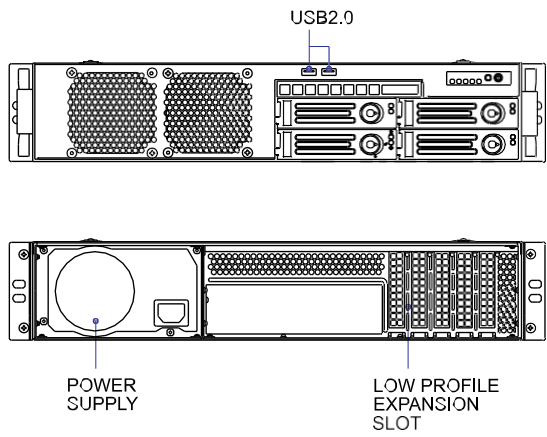

Dimensions



Packing List

Extension front panel cable
Screws bag
Key (optional)

Optional Parts

Description	Part Number
2U Slide Rail Thin type : 19" to 26.6" ball-bearing, quick, tool-free	A1-SC21601-XX00T001
2U Slide Rail Thin type : 26.5" to 36.4" ball-bearing, quick, tool-free	A1-SC83607-XX00T001
500W 80PLUS PS/2 ATX power supply	
3.5" swappable HDD Tray with lock function (One set key included)	A5-CSR1105-XX00C101
3.5" swappable HDD Tray without lock function	A5-CSR2501-XX00C101
HDD backplane SAS/SATA 6Gb/s to Mini-SAS with SGPIO	
HDD backplane SAS/SATA 6Gb/s to SATA.	
2U plastic front bezel (One set key included)Black	A5-SC82505-B101C001
3.5"HDD to 2.5"HDD tray bracket	01-SC81523-XX00C103
2x2.5" internal HDD bracket	